

LASER PAGE READER FOR BARCODED DOCUMENTS



Technical Features

Standard Features

Automatic feeding / Adjustable document separation.
Automatic document alignment.
Automatic double feeding detection.
Automatic miss out of paper, overlap & paper jam detection.
Automatic cleaning on start-up & during jam conditions.
User-programmable reject capability.
Alphanumeric display for status messages.

Optional Features

Downloadable Firmware allows on site customisation & upgrades.
PDF 417 & other 2D symbologies in restricted cases.

Operation

Input tray capacity: 550 docs. (90gr/m2 paper)
Output trays capacity: 400 docs (accepted), 70 docs. (rejected)
Transport speed: 120 pages/min (A4 or letter)
Maximum reads: up to 60 codes/page

Documents

Documents size:
A4 (Europe) or Letter (U.S.A.) or smaller.
Minimum size: 2.5" x 3.5" (63 mm x 89 mm)
Maximum size: 9" x 12" (228 mm x 304 mm)
Paper density: 80 gr/m2 up to 160 gr/m2 (+ stucked labels)

Barcode

Readable symbologies: Code 39, Code 128, I2/5, Codabar, UPC/EAN (standard symbologies)
Readable digits: 62 chars./code
Maximum code length: 5" (127 mm)
Maximum code height: 3" (762 mm)
Minimum bar width: 17 mils.

Host communications


Type: RS232C (standard)
Speed: 1200 bps up to 38400 bps.

Specifications.

Physical:
Dimensions: 28" x 15 1/2" x 17" (715 mm (l) x 390 mm (w) x 435 mm (h))
Weight: 77 lbs. (35 kg)

Environment:
Operating temperature: 50 to 95 degrees Fahrenheit (+10 to +35 degrees Centigrades)
Relative operation humidity: 20% to 80% without condensation.

Power:
Voltage: 115/230V (+10%/-15%) 50/60 Hz.
Network filter: Delta EMI
Interference filter
Power consumption: 100W

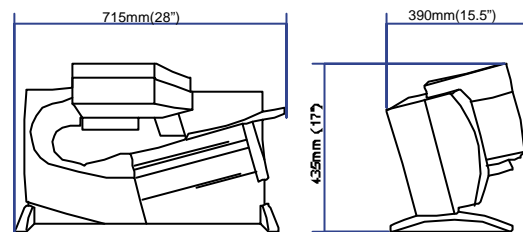

 **symetry**

Sierra Candela 34,
Col. Lomas de Chapultepec, 11000
México D.F.
Tels.: 5095 3452, 5095 3453
Fax: 5550 5586
info@symetry.com.mx
www.symetry.com.mx

